

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number
WO 2004/027515 A1

(51) International Patent Classification⁷: G03B 21/56

(21) International Application Number:
PCT/KR2003/001884

(22) International Filing Date:
15 September 2003 (15.09.2003)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
20-2002-0028755
18 September 2002 (18.09.2002) KR

(71) Applicant and

(72) Inventor: CHOI, Hae-Yong [KR/KR]; Mookdong I
Park Apartment #108-301, 385 Mook-dong, Jungrang-ku,
Seoul-city 131-768 (KR).

(74) Agent: CHOI, Dall-Ryong; Rm#506, Poonglim Bldg.,
823-1 Yoksam-dong, Kangnam-ku, Seoul-city 135-784
(KR).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: WALL ROLL-UP SCREEN

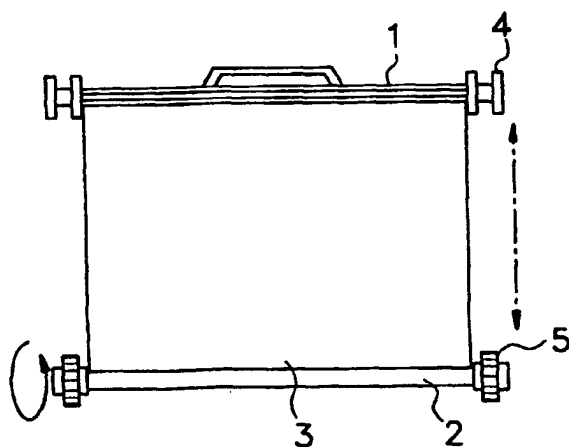

(a)

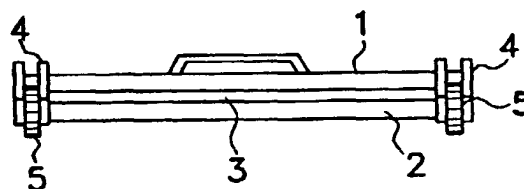

(b)

(57) Abstract: The device relates to a wall roll-up screen of which the upper and the lower are attached with the upper short rod and the lower short rod, respectively, wherein the screen is constituted to be rolled up when not in use and to be unrolled when used, by the lower short rod; and the left and the right end of the upper short rod are mounted with steel structure of groove shaped ringscapable of coupling magnets and the left and the right end of the lower short rod are mounted with magnets to allow them to be coupled with the groove shaped rings of the left end and the right end of the upper short rod, upon rolling up the screen by the lower short rod and, if necessary, separating the magnets from the groove shape rings, thereby to obtain good portability and mobility of the screen, to prevent the screen from being twisted from side to side upon fixing the screen, and to improve aesthetic value of product.